


SD560RGB	24	10	RGB	IP	CRI
Model	Voltage 24V	Width 10 mm	RGB	33:IP33 (Dry) 55:IP55 (Wet) 65:IP65 (Wet) 67:IP67 (Wet)	80+



CCT	Power	Brightness	Luminous flux
RGB	4.4 w/ft	158 lm/ft	36 lm/w
R	1.46 w/ft	47 lm/ft	32 lm/w
G	1.46 w/ft	98 lm/ft	67 lm/w
B	1.46 w/ft	20 lm/ft	14 lm/w

Dimension

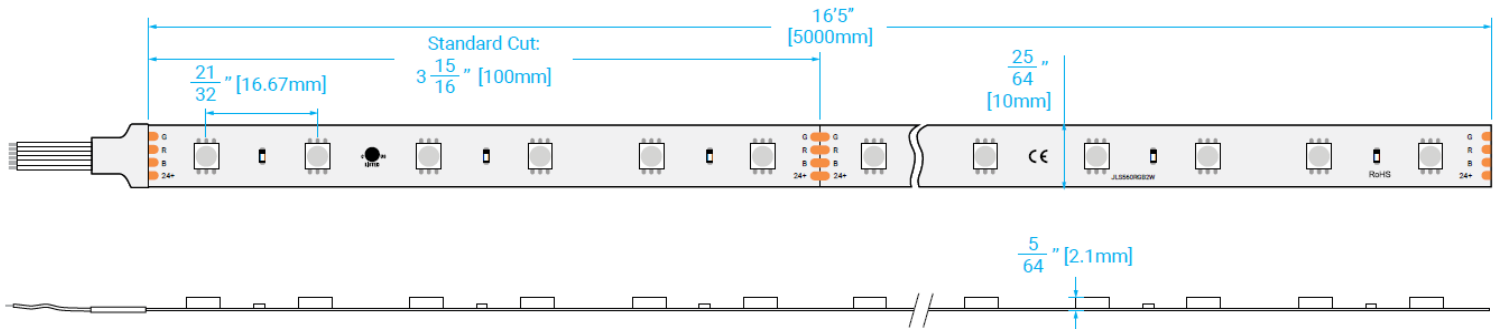

Standard CCT



R:620nm G:525nm B:470nm

Waterproof Rank



IP33

Non waterproof



IP55

Silicone Coating



IP65

waterproof



IP67

Silicone Extrusion

LED Type	SMD5050RGB – 60LED/M
Input Voltage	24V DC
Beam angle	120°
CRI	80+
Power	14.4w/m (4.4 w/ft)
Length/Reel	5m (16.4ft) / 50m (164ft)
Cut Length	100mm/unit (3.94in/unit)
IP Grade	IP33 / IP55 / IP65 / IP67
Dimming Method	0-10V,RX,PWM,RF,Bluetooth,Wifi