


<b>SD8120</b>	<b>24</b>	<b>8</b>	<b>CCT</b>	<b>IP</b>	<b>CRI</b>
Model	Voltage 24V	Width 8mm	27:2700K 30:3000K 40:4000K 60:6000K	33:IP33 (Dry) 55:IP55 (Wet) 65:IP65 (Wet) 67:IP67 (Wet)	80+




CCT	Power	Brightness	Luminous flux
2700K	4.4 w/ft	447 lm/ft	102 lm/w
3000K	4.4 w/ft	480 lm/ft	109 lm/w
4000K	4.4 w/ft	509 lm/ft	116 lm/w
6000K	4.4 w/ft	496 lm/ft	113 lm/w

## Dimension

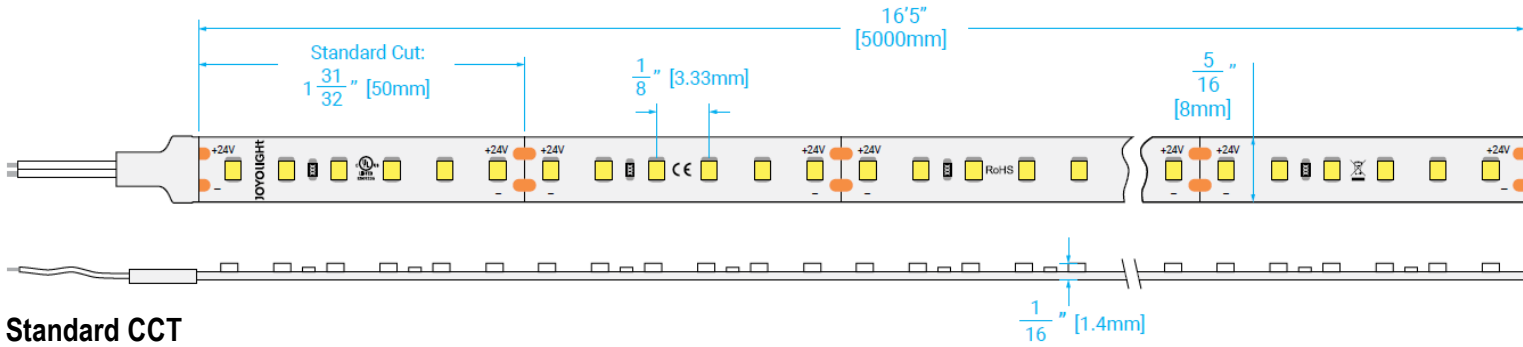

## Standard CCT

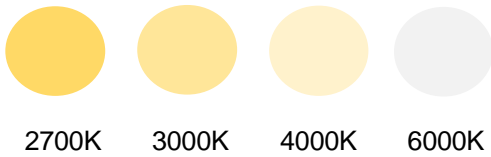

## Waterproof Rank



IP33

Non waterproof



IP55

Silicone Coating



IP65

waterproof



IP67

Silicone Extrusion

LED Type	SMD2835 – 120LED/M
Input Voltage	24V DC
Beam angle	120°
CRI	80+
Power	14.4w/m (4.4 w/ft)
Current	0.6A/m (0.183A/ft)
Length/Reel	5m (16.4ft) / 50m (164ft)
Cut Length	50mm/unit (1.97in/unit)
IP Grade	IP33 / IP55 / IP65 / IP67
Dimming Method	0-10V,RX,PWM,RF,Bluetooth,Wifi