


# DC24V SMD5050 RGBW LED Strip

SD560RGBW	24	12	CCT	IP	CRI
Model	Voltage 24V	Width 12 mm	3000K 4000K	33:IP33 (Dry) 55:IP55 (Wet) 65:IP65 (Wet) 67:IP67 (Wet)	80+




CCT	Power	Brightness	Luminous flux
RGBW	5.85 w/ft	270 lm/ft	46 lm/w
R	1.46 w/ft	35 lm/ft	24 lm/w
G	1.46 w/ft	91 lm/ft	62 lm/w
B	1.46 w/ft	27 lm/ft	18 lm/w
3000K	1.46 w/ft	113 lm/ft	77 lm/w
4000K	1.46 w/ft	116 lm/ft	79 lm/w

## Dimension

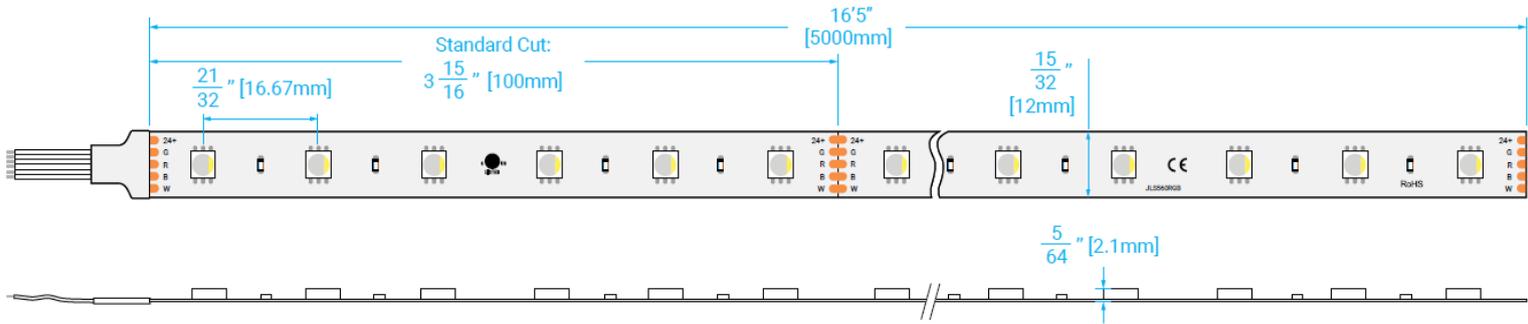

## Standard CCT

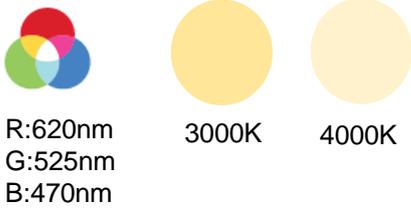

LED Type	SMD5050RGBW – 60LED/M
Input Voltage	24V DC
Beam angle	120°
CRI	80+
Power	RGBW 5.85 W/ft
Length/Reel	5m (16.4ft) / 50m (164ft)
Cut Length	100mm/unit (3.94in/unit)
IP Grade	IP33 / IP55 / IP65 / IP67
Dimming Method	0-10V,RX,PWM,RF,Bluetooth,Wifi

## Waterproof Rank



IP33

Non waterproof



IP55

Silicone Coating



IP65

waterproof



IP67

Silicone Extrusion