



48V Magnetic Track System

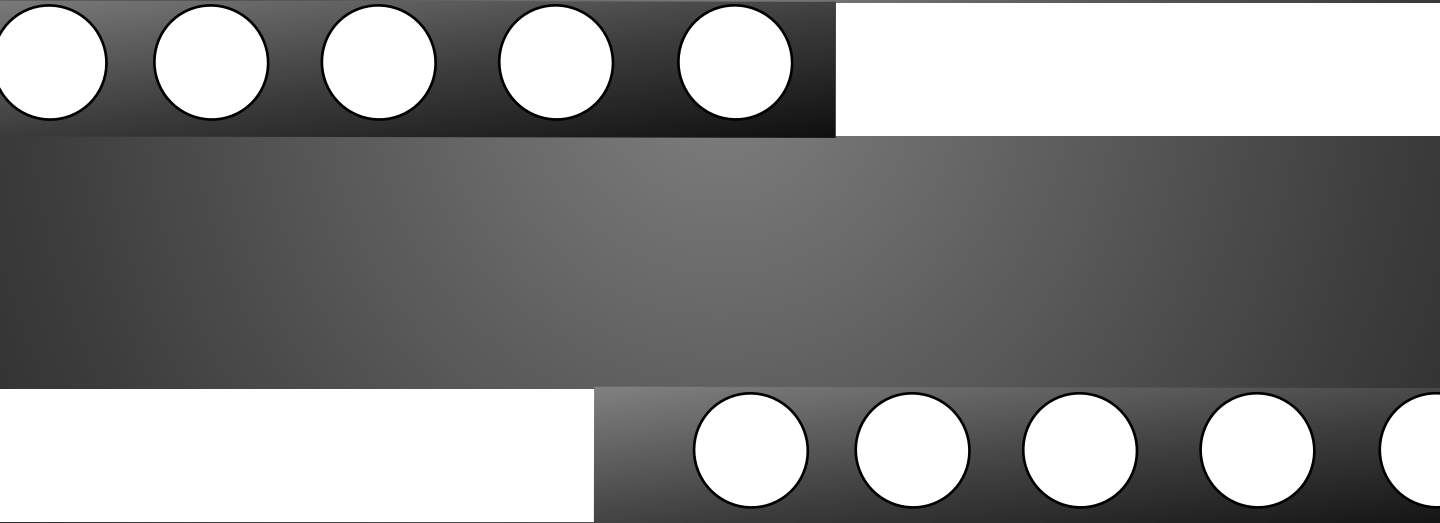

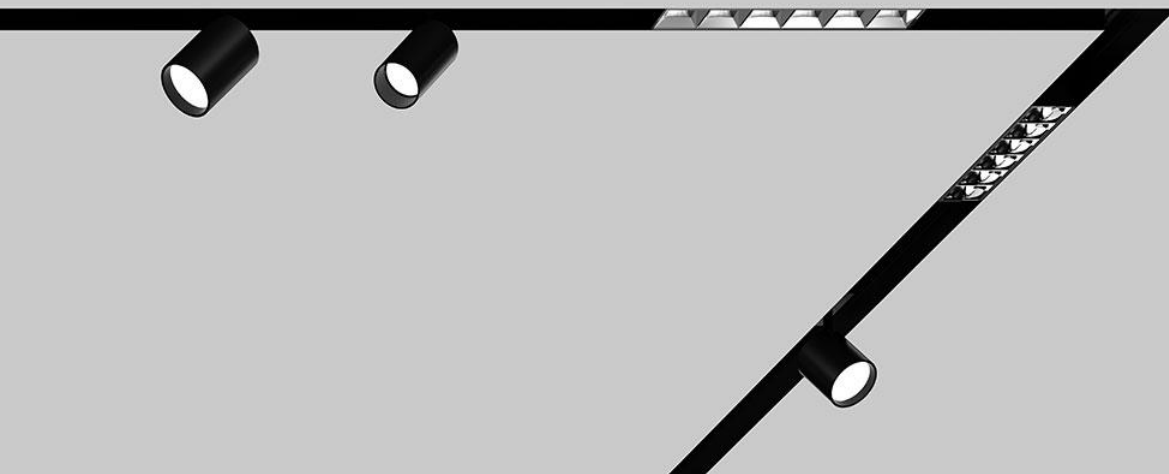

Magnets make life simple

Different light fixtures are held in place by magnetic force along the entire track. No tools are needed to install them. Rotate, Slide into any position, and adjust at any time— all it takes is one hand movement to highlight objects according to requirements

Lighting Solution

Made in Magnetic Track Light System



Living Room






Living Room






Gallery



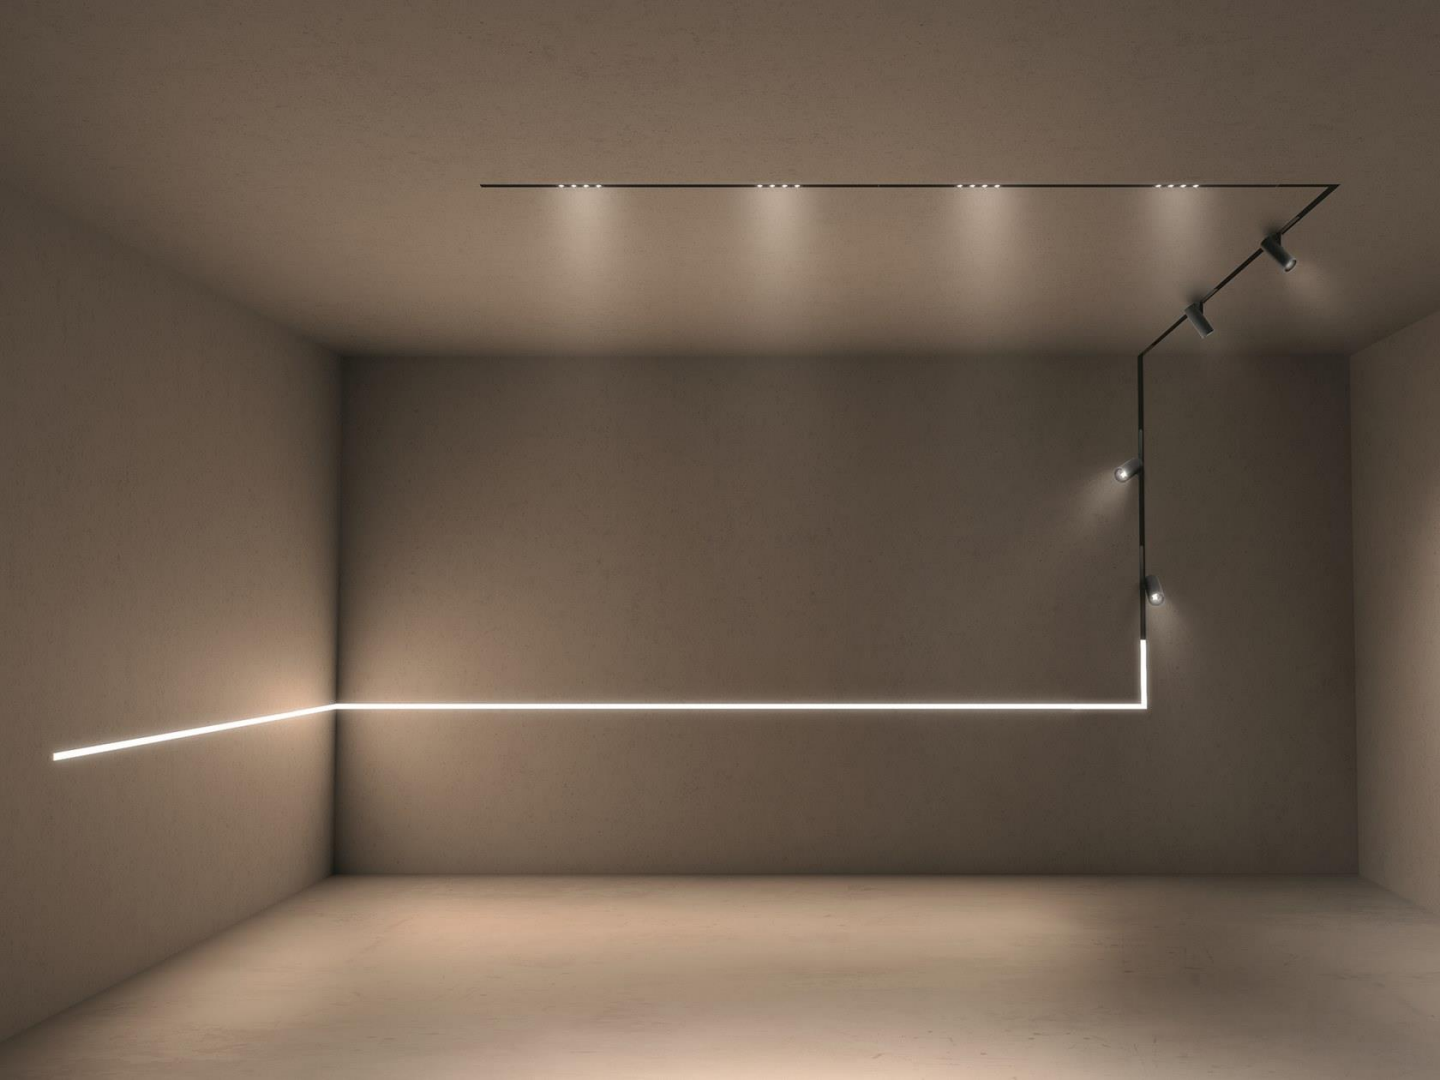

The effect in space

Magnetic track light system has the flexibility to adapt to every new situation and react to changing requirements in a room- whether you want to evenly light an entire wall or accentuate a particular object. maximum flexibility within the room is ensured since no tools are needed for adjustment, spots are easy to swivel and tilt, and beams can be focused. Light fixtures can be analog-dimmed with no flickering to create the optimal setting.

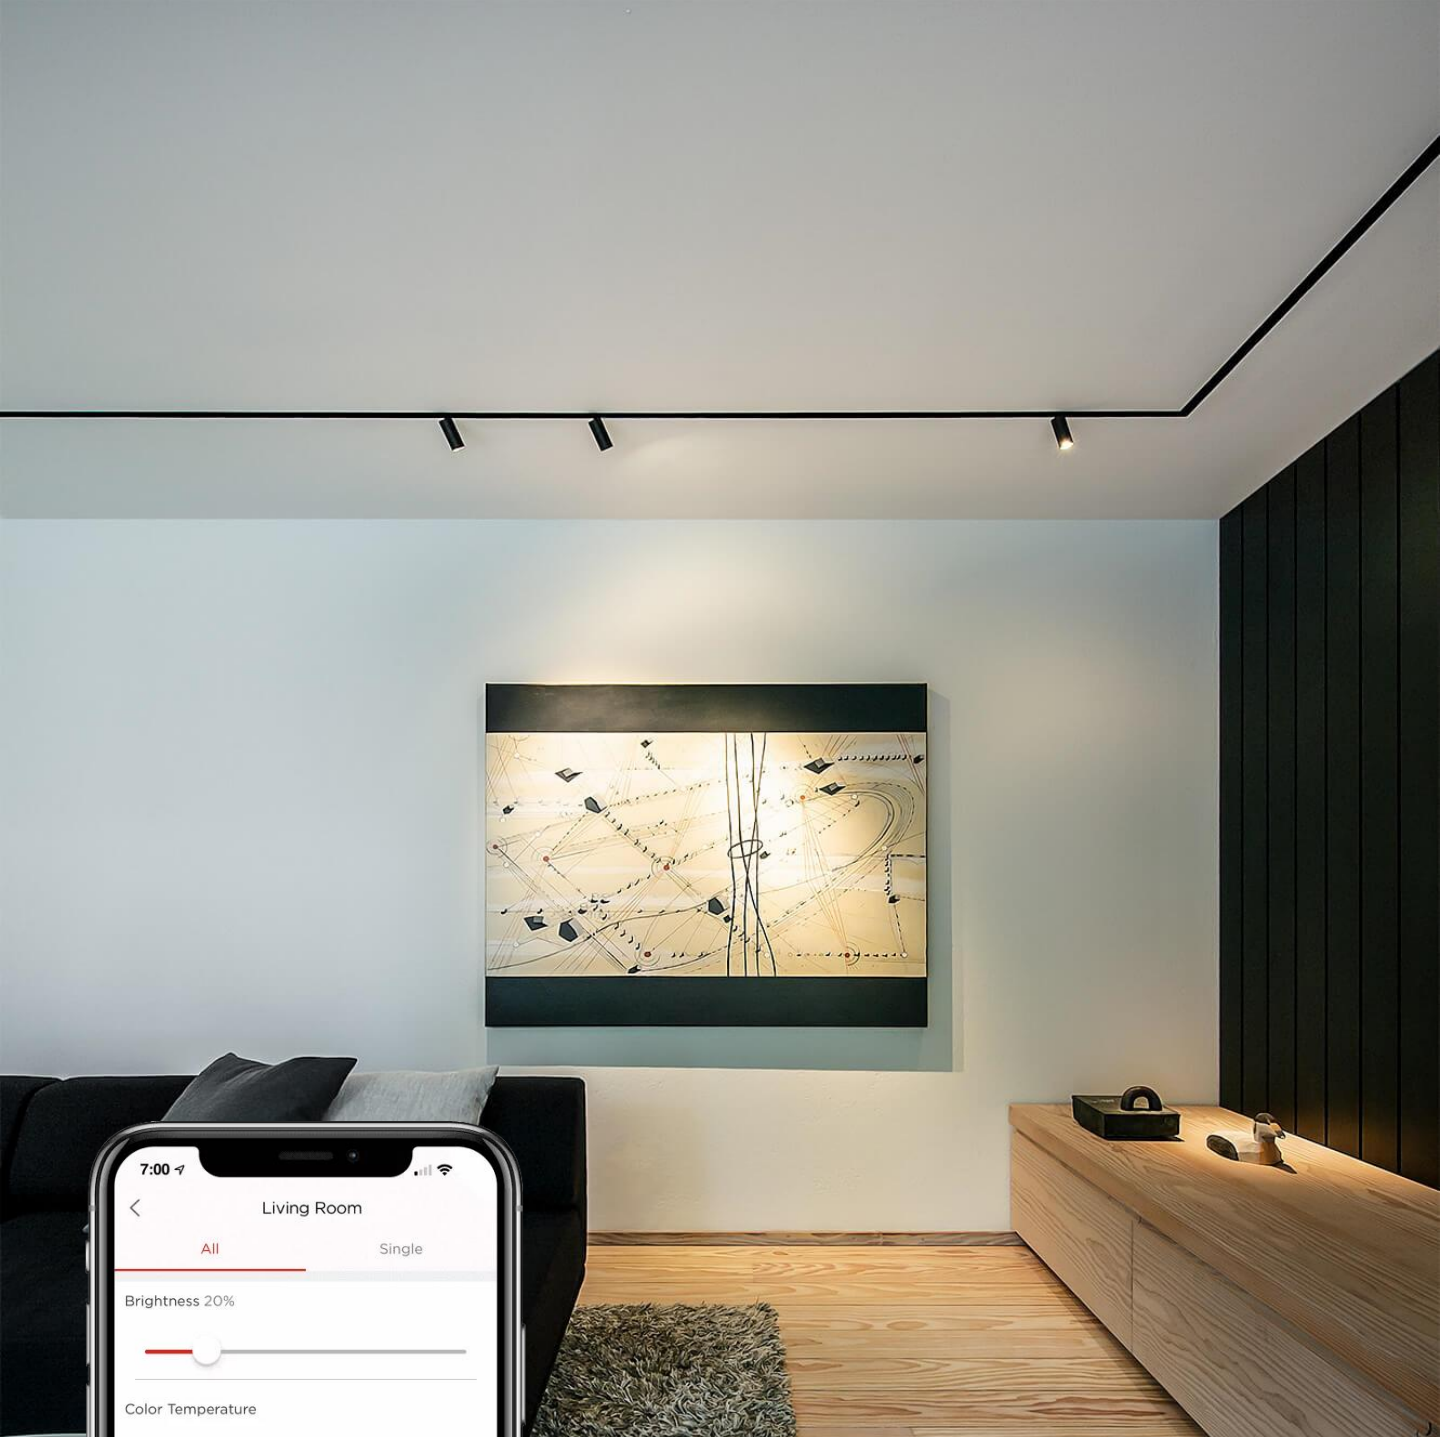

Wireless control by WiFi, Bluetooth

Control your lighting from anywhere, any time by your smartphone or tablet. Not only dim the brightness, but set different scenes as your needs.



Home Automation By KNX

An intelligent solution for networking and controlling intelligent building technology. Due to the targeted linking of devices and functions in accordance with the KNX standard, both living and working have not only become more convenient and secure but also more energy efficient and economical



Spotlight

Precision engineering allows spots to swivel 360° and tilt 90°, a snoot ensure that objects are shown off to great effect.

Spotlight



DC
48V

IP
20

Bridg
elux






| Model | W | LUM | CCT | CRI |
|---------|---|-----|-------|-----|
| CFC1035 | 5 | 550 | 4000K | 90 |

CFC1035

OPTIONS

| | |
|-------------------|---|
| Color | RAL9004 |
| Beam angle | 15° / 24° / 38° / 50° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 90Ra / 95Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |


Dimension (mm)




DC
48V

IP
20

Bridg
elux






| Model | W | LUM | CCT | CRI |
|---------|----|------|-------|-----|
| CFC1045 | 10 | 1100 | 4000K | 90 |

CFC1045

OPTIONS

| | |
|-------------------|---|
| Color | RAL9004 |
| Beam angle | 15° / 24° / 38° / 50° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 90Ra / 95Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)





Linear

Linear makes an impact with their streamlined design and generate base lighting that illuminates objects and rooms especially evenly. When combined with spotlight, linear can stage architectural elements, museum spaces, and retail spaces to great effect.


Linear

MS600

OPTIONS

| | |
|-------------------|---|
| Color | RAL9004 |
| Beam angle | 120° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 80Ra / 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)


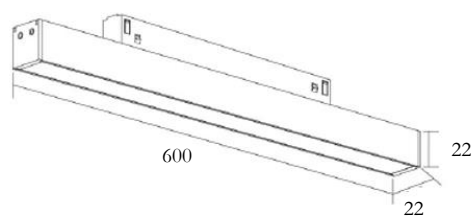


MS900


OPTIONS

| | |
|-------------------|---|
| Color | RAL9004 |
| Beam angle | 120° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 80Ra / 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |


Dimension (mm)

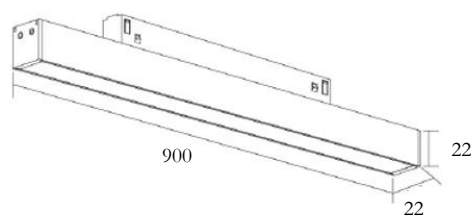

| Model | W | LUM | CCT | CRI |
|-------|----|------|-------|-----|
| MS600 | 15 | 1650 | 4000K | 80 |



| Model | W | LUM | CCT | CRI |
|-------|----|------|-------|-----|
| MS900 | 20 | 2200 | 4000K | 80 |

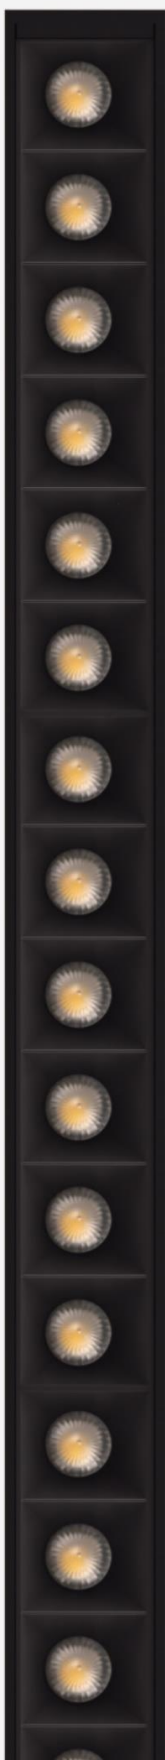

Dots

Dots feature a reduced design vocabulary. LEDs retreat into the background, lending ceiling a perfectly subdued look. The high light output creates an effective setting for displaying objects.


Dots




DC
48V

IP
20

Lumi
leds






| Model | W | LUM | CCT | CRI |
|-------|---|-----|-------|-----|
| MS06 | 6 | 660 | 4000K | 80 |




DC
48V

IP
20

Lumi
leds






| Model | W | LUM | CCT | CRI |
|-------|----|------|-------|-----|
| MS12 | 12 | 1320 | 4000K | 80 |

MS06

OPTIONS

| | |
|-------------------|---|
| Color | RAL9004 |
| Beam angle | 24° / 36° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 80Ra / 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)

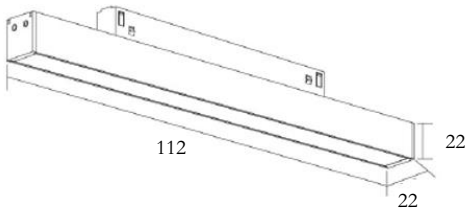



MS12

OPTIONS

| | |
|-------------------|---|
| Color | RAL9004 |
| Beam angle | 24° / 36° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 80Ra / 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)

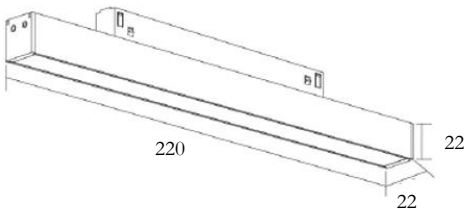

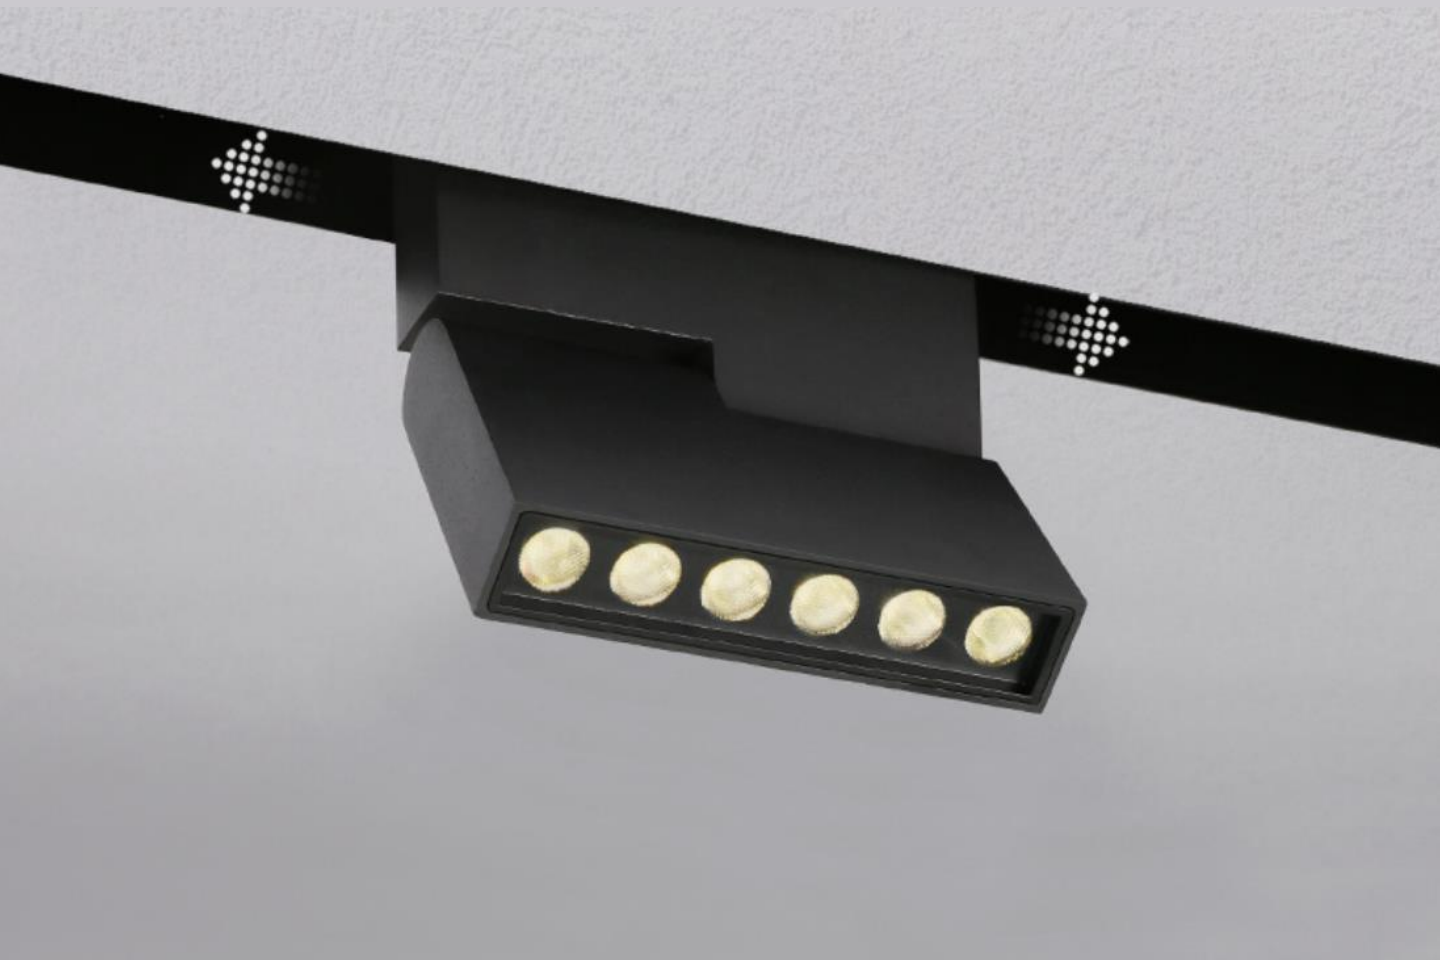

WallWasher

The wallwasher stands out for its even vertical light distribution and its remarkably slim design. It also fully protects LEDs from contact and is easy to install.


Wallwasher

CWW06

OPTIONS

| | |
|-------------------|---|
| Color | RAL9003 / RAL9004 |
| Beam angle | 120° / 36° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 80Ra / 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)

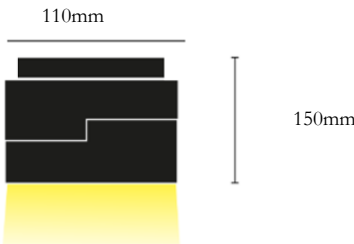


CWW12

OPTIONS

| | |
|-------------------|---|
| Color | RAL9003 / RAL9004 |
| Beam angle | 120° / 36° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 80Ra / 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)

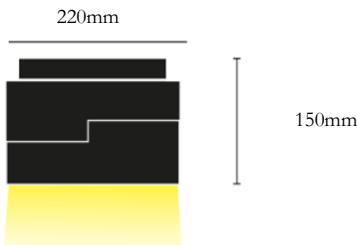

DC
48V

IP
20

Lumi
leds

| Model | W | LUM | CCT | CRI |
|-------|---|-----|-------|-----|
| CWW06 | 6 | 660 | 4000K | 80 |



DC
48V

IP
20

Lumi
leds

| Model | W | LUM | CCT | CRI |
|-------|----|------|-------|-----|
| CWW12 | 12 | 1320 | 4000K | 80 |

A modern kitchen interior featuring a long, light-colored wooden countertop with a dark, textured surface. Three black, cylindrical pendant lights hang from the ceiling. The ceiling is white with a perforated pattern. In the background, there is a glass-fronted cabinet displaying various items, and a staircase with a wooden railing is visible on the left. The overall design is minimalist and contemporary.

Pendant

Suspended luminaires, which are integrated directly into the tracks, allow the magnetic track system to do even more - including for living areas, bars, and reception areas. TULA and decorative accents distribution and its remarkably slim design. It also fully protects LEDs from contact and is easy to install.


Pendant




DC
48V

IP
20

Bridg
elux






| Model | W | LUM | CCT | CRI |
|--------|---|-----|-------|-----|
| CFC300 | 5 | 550 | 4000K | 90 |




DC
48V

IP
20

Lumi
lcs






| Model | W | LUM | CCT | CRI |
|-------|----|------|-------|-----|
| CFC50 | 10 | 1100 | 4000K | 90 |

CFC40

OPTIONS

| | |
|-------------------|---|
| Color | RAL9004 |
| Beam angle | 24° / 36° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)




CFC50

OPTIONS

| | |
|-------------------|---|
| Color | RAL9003 / RAL9004 |
| Beam angle | 24° / 36° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)



Pendant



DC
48V

IP
20

Bridg
elux

| Model | W | LUM | CCT | CRI |
|--------|----|-----|-------|-----|
| CFC150 | 10 | 800 | 4000K | 80 |



DC
48V

IP
20

Lumi
lcs


| Model | W | LUM | CCT | CRI |
|--------|----|------|-------|-----|
| CFC300 | 12 | 1320 | 4000K | 80 |

CFC150

OPTIONS

| | |
|-------------------|---|
| Color | RAL9003 / RAL9004 |
| Beam angle | 360° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 80Ra / 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)





CFC300

OPTIONS

| | |
|-------------------|---|
| Color | RAL9003 / RAL9004 |
| Beam angle | 60° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 80Ra / 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)



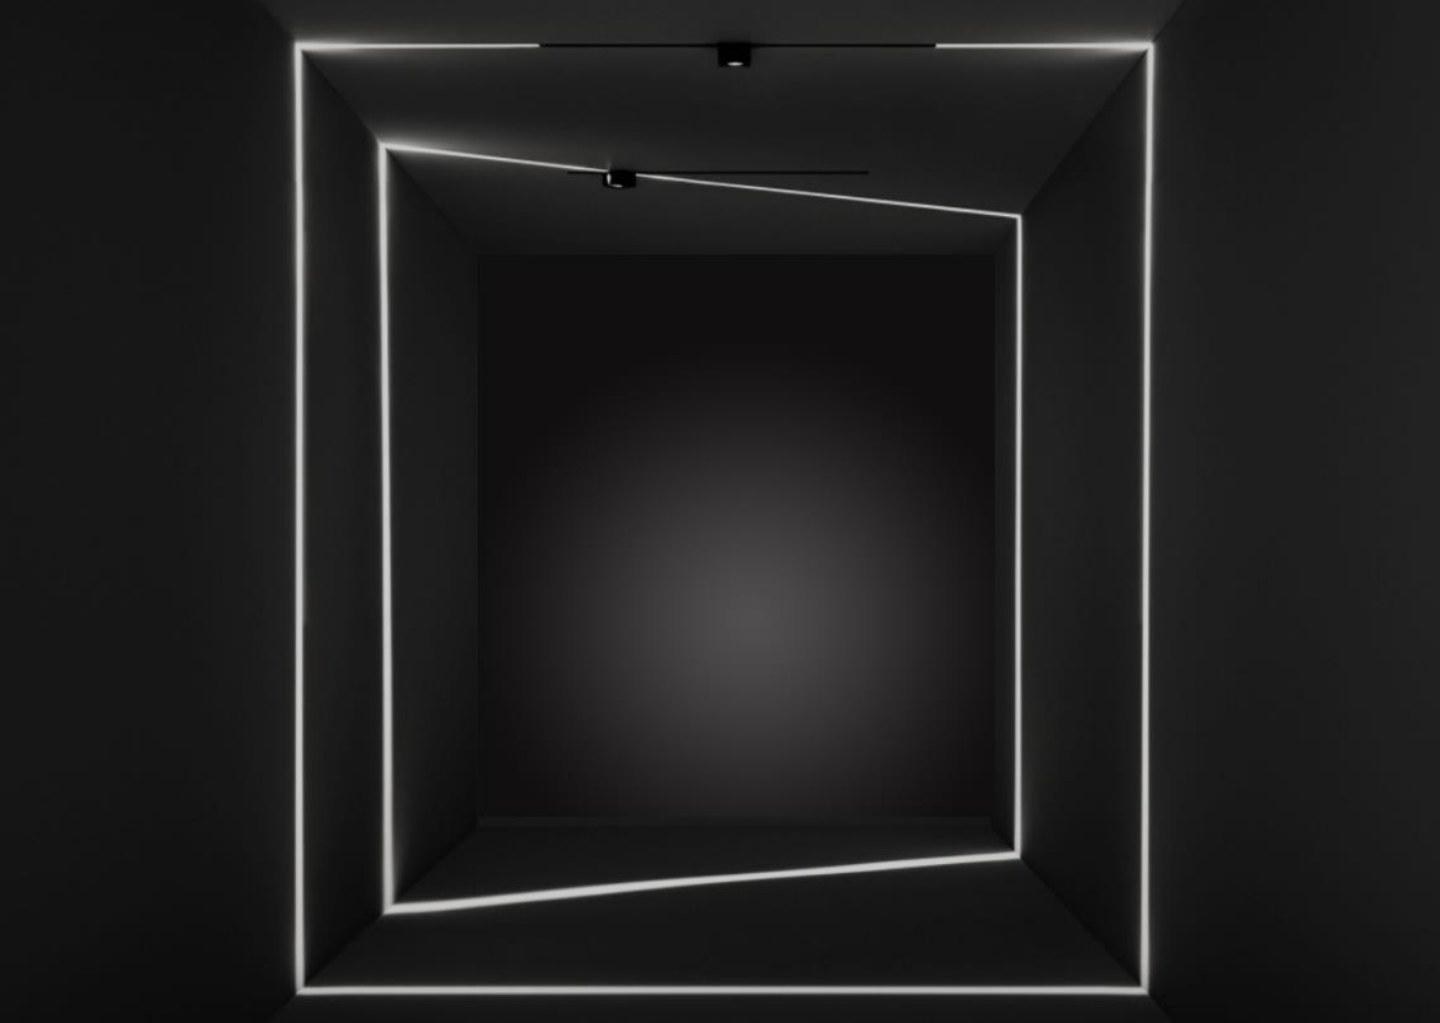

Trick – Special Line

The fixture offers new opportunities for architectural lighting of spaces with lighting graphics. The fixture can be installed anywhere on the track and can be easily repositioned.

The luminaire produces a continuous line of light on surrounding surfaces. The optical effect of all-round peripheral lighting is created by a special toroidal lens.

Rotating design allows to turn the fixture around its axis.



DC
48V

IP
20



Bridg
elux

TL120

OPTIONS


| | |
|-------------------|---|
| Color | RAL9003 |
| Beam angle | 360° |
| CCT | 2700K / 3000K / 4000K / 5000K |
| CRI | 90Ra |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

Dimension (mm)



| Model | W | LUM | CCT | CRI |
|-------|---|-----|-------|-----|
| TL120 | 6 | 480 | 4000K | 90 |



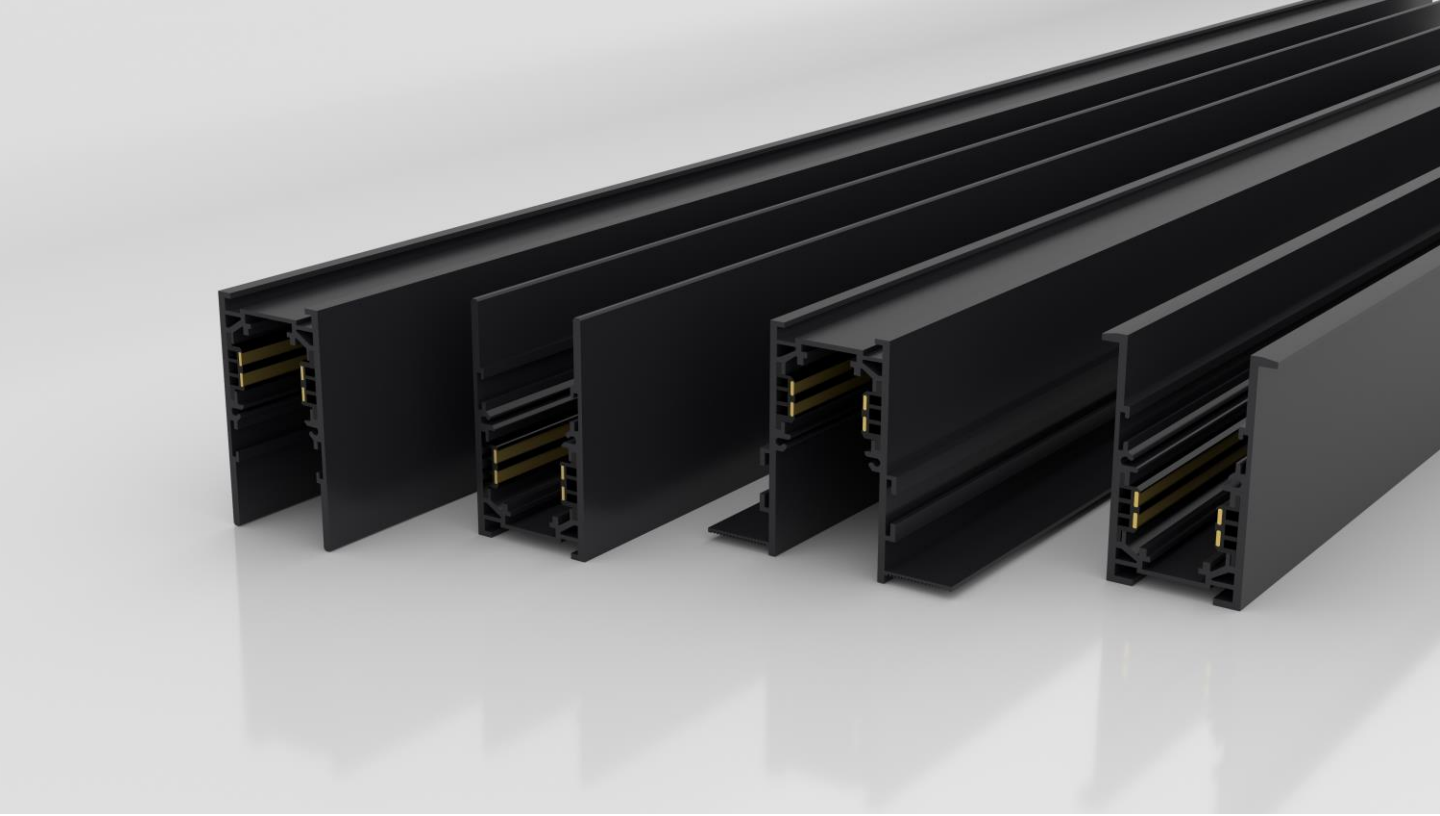

Channel Variety

The magnetic track system is available as a recessed, surface-mounted, and suspended option. The suspended direct/indirect model also enables optional indirect lighting. The power track system use 48V. Each spot can be switched on and off and dimmed individually wirelessly via WIFI, Zigbee or using a DALI signal.

Track




MC510

| | |
|-----------|----------|
| DC 48V | IP 20 |
|-----------|----------|

OPTIONS

| | |
|--------------|-----------------------------|
| Color | RAL9004 |
| Length | 1000mm / 2000mm / 3000mm |
| Installation | Suspended / surface mounted |




EMC575

| | |
|-----------|----------|
| DC 48V | IP 20 |
|-----------|----------|

OPTIONS

| | |
|--------------|--------------------------|
| Color | RAL9004 |
| Length | 1000mm / 2000mm / 3000mm |
| Installation | Trimless recessed |

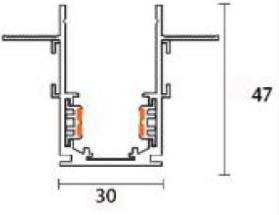

Track




RMC574


| | |
|-----------|----------|
| DC 48V | IP 20 |
|-----------|----------|

OPTIONS


| | |
|-------------------|---|
| Color | RAL9003 / RAL9004 |
| Length | 1000mm / 2000mm / 3000mm |
| Installation | Recessed |
| Electrical option | Non Dim / DALI / 1-10V / 2.4G / Bluetooth |

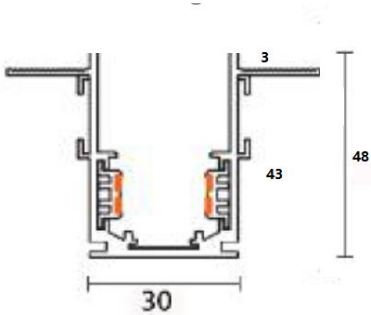


Node Connectors

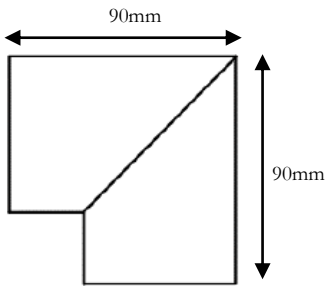

Vertical connector
SD-572

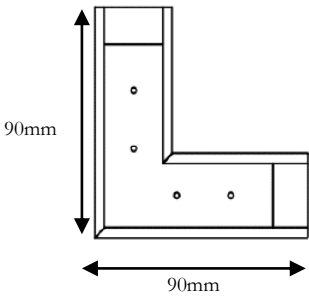

Horizontal connector
SD-573

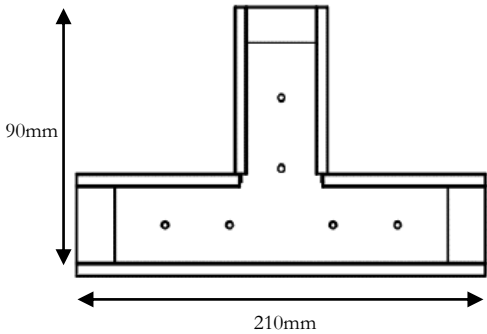

T connector
SD-574

Accessory

Remote Transformer



LRS-150-48

Internal Transformer



SD-100-48

End Feed In



SD-M562

Joining Connector



SD-567

L Feed



SD-568

Joint Plate



SD-592

Suspension Kits




SD-M591

Blind Cover



SD-M594

Installation (non-dimmable Version)

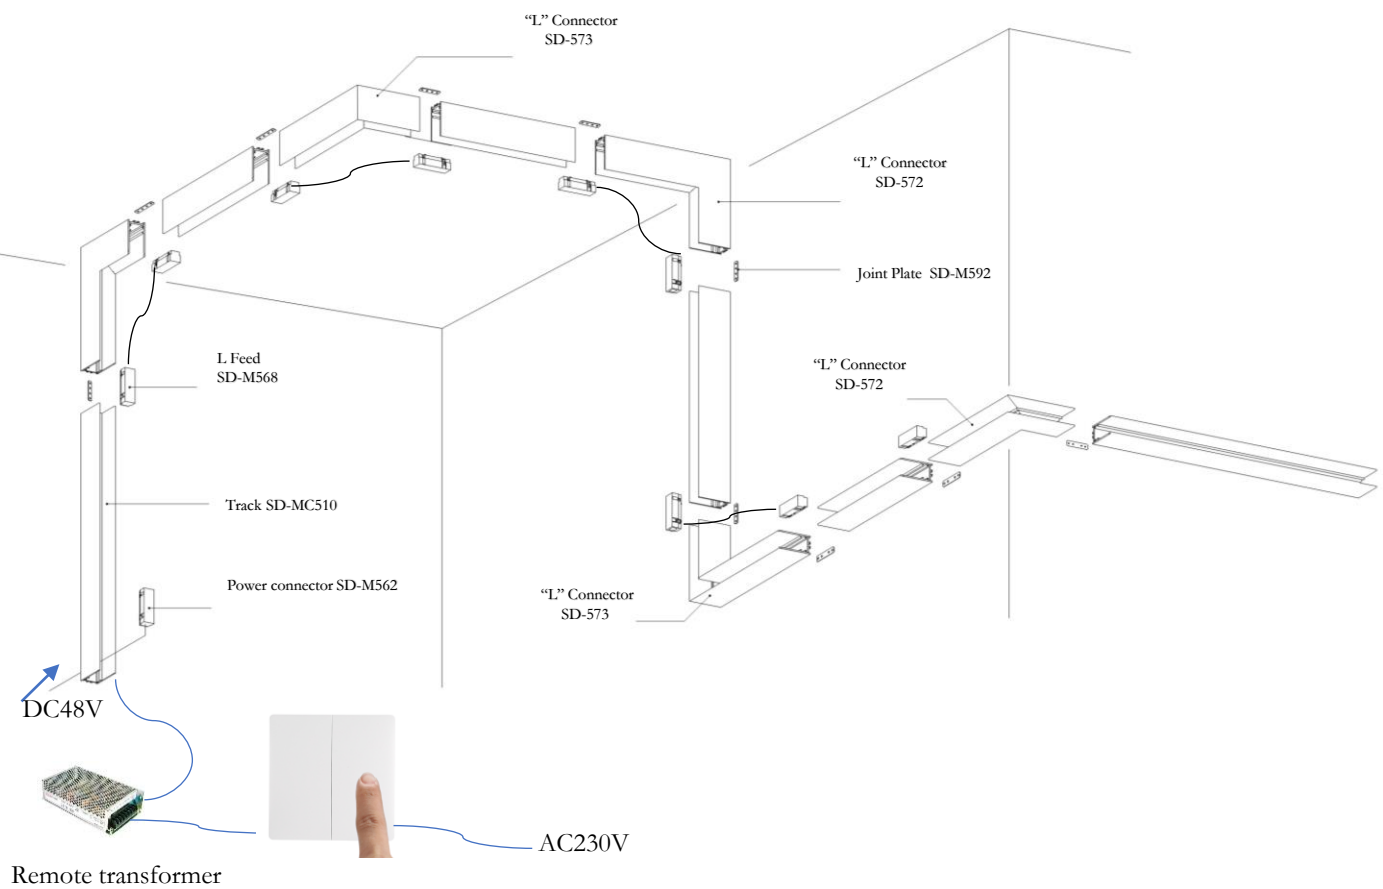

SD-M562



SD-M568



MC510



SD-573



SD-M572



SD-M592



Topsund Lighting Co.,LTD

www.topsund-led.com

info@topsund-led.com

**6Floor,Xinggong Road,Yutang street
Guangming District**